

Unisound Combifloor Pro

QSUDLPRO10



Product description

This underlay has a 3-layered structure, that reduces drum sound to a minimum..
With its characteristics, the Unisound Combifloor Pro is the ideal choice for professionals.

Content: 1 roll = 10m²

Packing Unit: 1

Dimensions:

10m x 1 m

Thickness: 2mm


Weight: 15.5kg

Applications

Before laying your Quick-Step® floor, you must install an underlay. A good underlay provides the stable foundation that your quality floor deserves and also insulates against sound and heat.

When you want to reduce drum sound (annoying drumming effect) to a minimum, then the Quick-Step® Unisound Pro underlay is the ideal choice.

Characteristics

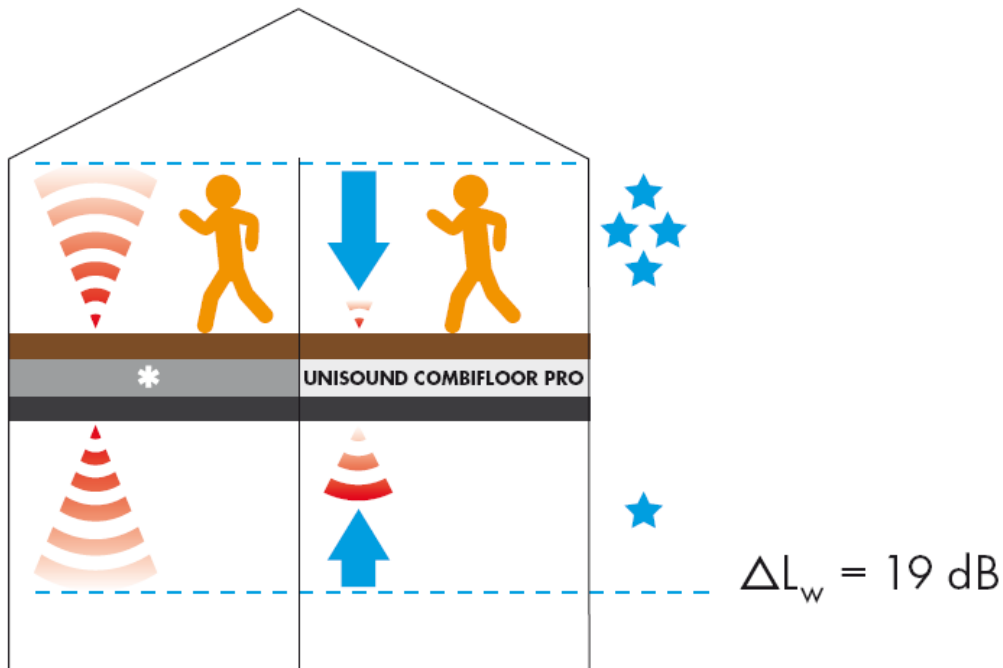

* standard sub-floor

√ Maximum reduction of drum sound

The Quick-Step® Unisound Pro consists of three different materials:

- an extra strong damp foil
- A heavy and odour-free rubber layer
- and a soft foam



This means it fits closely onto the underfloor and reduces drum sound to a minimum.

√ Good reduction of transmission sound

The 3-layered structure reduces the sound waves beneath the floor (can be annoying for downstairs neighbours).



($\Delta L_w = 19 \text{ dB}$ - ISO 140-8 norm - 8mm)

√ Optimum protection against rising damp

This protective layer provides an extra barrier to protect your Quick-Step® floor from rising damp



- √ Ideal for your floor with Uniclic system



The smooth surface of the protective layer lets the laminate floor expand and contract more easily (wood lives). In addition, the smooth surface prevents the underlay from getting stuck between the tongue and groove of the planks when installing.

- √ A stable base for your floor



Thanks to its weight (15.5kg), the Quick-Step® Unisound Pro fits closely onto the sub-floor. This provides a stable and solid working surface during installation: the ideal choice for professionals.

- √ Suitable for underfloor heating



The Quick-Step® Unisound Pro underlay is suitable for rooms with underfloor heating. No odours or harmful substances are released when heated.

- √ Quick preparation before installation of your floor



The protective layer is integrated in the underlay so there's no need to install a separate damp foil.

- √ Permanently absorbs pressure and impacts.



The use of accessories other than the Quick-Step® accessories might cause damage to the Quick-Step® floor. In such case the guarantee provided by Quick-Step® will be void. We therefore advise to use only Quick-Step®

accessories as these have been especially designed and tested for the use with Quick-Step® floor panels.

Instructions

- √ Roll out the underlay with the Quick-Step® logo on top. Lay the underlay strips parallel to the laying direction of your Quick-Step® floor.
- √ Lay the first underlay row with a 2 cm flap up against the wall.
- √ Lay the next row with flap next to the first. Remove the adhesive strip and stick the foil flap of the second row on top of the first row.
- √ Make sure the underlay fits together tightly and the foil flap sticks correctly.