

Transitsound Ultra

QSUDLTRA10



Transitsound Ultra
Geluidreductie:



$\Delta L_{in} = 11\text{dB}$
 $\Delta L_w = 21\text{dB}$

Laminaat met klik-verbinding,
los gelegd op de ondervloer

Conform NEN-EN-ISO 140-8 en 717-2

Dossiernr.: 06-08989

Product Description

The Quick-Step® Transitsound Ultra, reduces transmission sound to a minimum. ($\Delta L_{in} = 11\text{ dB}$ - $\Delta L_w = 21\text{ dB}$).

This underfloor is supplied in a conveniently folded and easy-to-transport pack.

Content: 1 PC = 10m²

Packing Unit: 1

Dimensions:

10m x 1 m


Thickness: 3mm

Applications

Before laying your Quick-Step® floor, you must install an underlay. A good underlay provides the stable foundation that your quality floor deserves and also insulates against sound and heat.

When you want to reduce transmission sound to a minimum, than the Quick-Step® Transitsound Ultra is the ideal underlay.

Characteristics

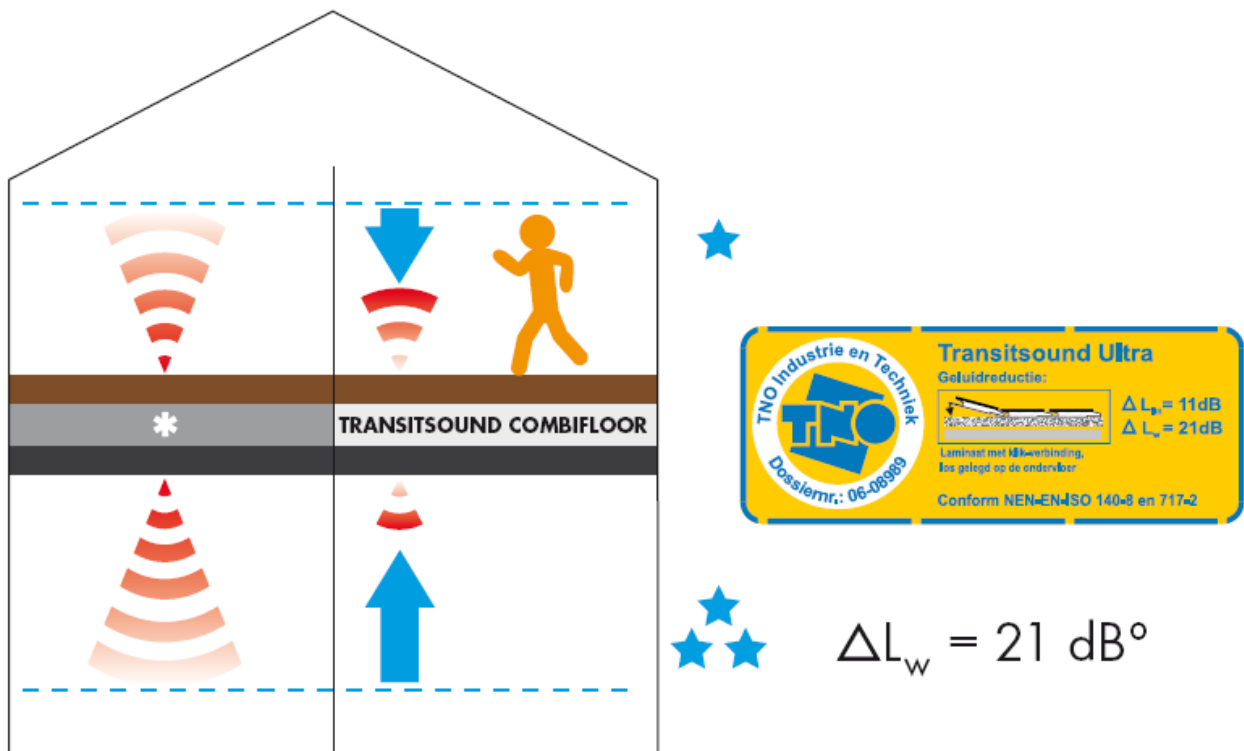

* standard sub-floor

✓ Maximum reduction of transmission sound



The Transitsound Ultra reduces the sound waves beneath the floor to a minimum (can be annoying for downstairs neighbours).

$\Delta L_{lin} = 11 \text{ dB} - \Delta L_w = 21 \text{ dB}$ (TNO norm – 8mm)

✓ Folded in a handy pack, easy to install!!

This underfloor is supplied in a conveniently folded and easy-to-transport pack.

✓ Good reduction of drum sound



This underlay not only reduces transmission sound. It also reduces drum sound (annoying drumming effect).

✓ Optimum protection against rising damp



The material of this underlay offers your floor the necessary protection against rising damp. You do not need to use a separate damp foil in combination with the Quick-Step® Transitsound Ultra.

Only the joints between the underlay strips need to be sealed with a damp-proof tape.

- √ Ideal for your floor with Uniclic system



The smooth surface of this underlay lets the laminate floor expand and contract more easily (wood lives). In addition, it prevents the underlay from getting stuck between the tongue and groove of the planks when installing.

- √ A stable base for your floor



Thanks to its 3mm thickness, the Transitsound ultra levels the surface of the screed. This provides an very flat and stable base for laying your Quick-Step® floor and it also provides a comfortable feel when you walk on the floor.

- √ Suitable for underfloor heating



The Quick-Step® Transitsound Ultra underlay is suitable for rooms with underfloor heating. No odours or harmful substances are released when heated..

- √ Permanently absorbs pressure and impacts.



The use of accessories other than the Quick-Step® accessories might cause damage to the Quick-Step® floor. In such case the guarantee provided by Quick-Step® will be void. We therefore advise to use only Quick-Step®

accessories as these have been especially designed and tested for the use with Quick-Step® floor panels.

Instructions

- √ Unfold the underfloor on the subfloor. Lay the underfloor strips parallel to the laying direction of your Quick-Step floor. Do this strip by strip, as the laying of your floor progresses.
- √ Make sure the strips of underfloor do not overlap; they must be laid perfectly adjacent to each other.
- √ Seal the joints between the underfloor with a damp-proof tape.